


# Insulated Cord End Terminals



Use note: series from 0.25to 16 installed by tool of YAC series  
series 25 to 150 installed by tool of YYT series

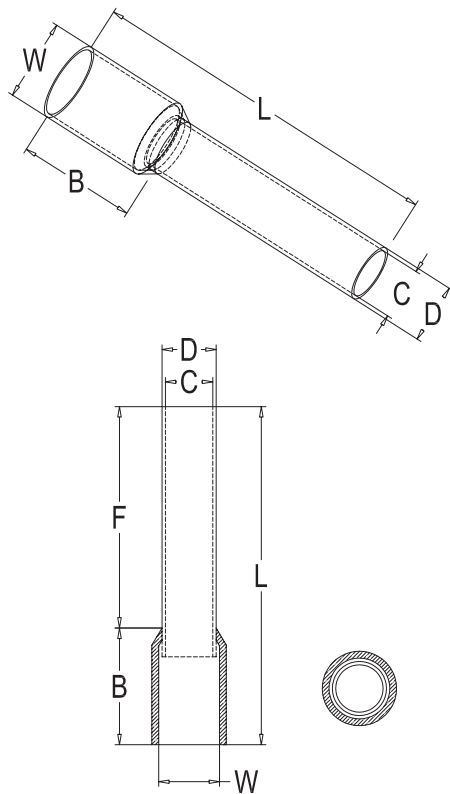


limited W.T : -14 to 105 U=300V Material of copper : tin coated copper

| Item No.  | DIMENSION |      |      |      |      |      | Insulated square |                 | Color      |             |
|-----------|-----------|------|------|------|------|------|------------------|-----------------|------------|-------------|
|           | F         | L    | W    | B    | D    | C    | A.W.G            | mm <sup>5</sup> | Germany    | France      |
|           | mm        | mm   | mm   | mm   | mm   | mm   |                  |                 |            |             |
| ET0.25-6  | 6         | 10.4 | 2.0  | 4.5  | 1.1  | 0.8  | #26              | 0.25            | Blue       | Purple      |
| ET0.25-8  | 8         | 12.5 |      |      |      |      |                  |                 |            |             |
| ET0.3-6   | 6         | 10.5 | 2.0  | 4.5  | 1.1  | 0.8  | #24              | 0.35            | Blue       | Purple      |
| ET0.3-8   | 8         | 12.5 |      |      |      |      |                  |                 |            |             |
| ET0.5-6   | 6         | 12.4 | 2.6  | 6.4  | 1.3  | 1.0  | #22              | 0.5             | Orange     | White       |
| ET0.5-8   | 8         | 14.4 |      |      |      |      |                  |                 |            |             |
| ET0.5-10  | 10        | 16.4 |      |      |      |      |                  |                 |            |             |
| ET0.5-12  | 12        | 18.4 |      |      |      |      |                  |                 |            |             |
| ET0.75-6  | 6         | 12.4 | 2.8  | 6.4  | 1.6  | 1.3  | #20              | 0.75            | White      | Blue        |
| ET0.75-8  | 8         | 14.4 |      |      |      |      |                  |                 |            |             |
| ET0.75-10 | 10        | 16.4 |      |      |      |      |                  |                 |            |             |
| ET0.75-12 | 12        | 18.4 |      |      |      |      |                  |                 |            |             |
| ET1.0-6   | 6         | 12.4 | 3.0  | 6.4  | 1.8  | 1.5  | #18              | 1.0             | Yellow     | Red         |
| ET1.0-8   | 8         | 14.4 |      |      |      |      |                  |                 |            |             |
| ET1.0-10  | 10        | 16.4 |      |      |      |      |                  |                 |            |             |
| ET1.0-12  | 12        | 18.4 |      |      |      |      |                  |                 |            |             |
| ET1.5-8   | 8         | 14.4 | 3.5  | 6.4  | 2.1  | 1.8  | #16              | 1.5             | Red        | Black       |
| ET1.5-10  | 10        | 16.4 |      |      |      |      |                  |                 |            |             |
| ET1.5-12  | 12        | 18.4 |      |      |      |      |                  |                 |            |             |
| ET1.5-18  | 18        | 24.4 |      |      |      |      |                  |                 |            |             |
| ET2.5-8   | 8         | 15.8 | 4.0  | 7.8  | 2.6  | 2.3  | #14              | 2.5             | Blue       | Gray        |
| ET2.5-10  | 10        | 17.8 |      |      |      |      |                  |                 |            |             |
| ET2.5-12  | 12        | 19.8 |      |      |      |      |                  |                 |            |             |
| ET2.5-18  | 18        | 25.8 |      |      |      |      |                  |                 |            |             |
| ET4.0-9   | 9         | 17.0 | 4.8  | 8.0  | 3.2  | 2.8  | #12              | 4.0             | Gray       | Orange      |
| ET4.0-12  | 12        | 20.0 |      |      |      |      |                  |                 |            |             |
| ET4.0-18  | 18        | 26.0 |      |      |      |      |                  |                 |            |             |
| ET6.0-10  | 10        | 18.2 | 6.1  | 8.2  | 3.9  | 3.5  | #10              | 6.0             | Black      | Green       |
| ET6.0-12  | 12        | 20.2 |      |      |      |      |                  |                 |            |             |
| ET6.0-18  | 18        | 26.2 |      |      |      |      |                  |                 |            |             |
| ET10-12   | 12        | 21.5 | 7.6  | 9.5  | 4.9  | 4.5  | #7               | 10.0            | Milk white | Brown       |
| ET10-18   | 18        | 27.5 |      |      |      |      |                  |                 |            |             |
| ET16-12   | 12        | 22.2 | 8.8  | 10.2 | 6.2  | 5.8  | #5               | 16.0            | Green      | Milk white  |
| ET16-18   | 18        | 28.2 |      |      |      |      |                  |                 |            |             |
| ET25-16   | 16        | 28.0 | 11.0 | 12.0 | 7.9  | 7.5  | #4               | 25.0            | Brown      | Black       |
| ET25-22   | 22        | 34.0 |      |      |      |      |                  |                 |            |             |
| ET35-16   | 16        | 30.0 | 12.7 | 14.0 | 8.7  | 8.3  | #2               | 35.0            |            | Brown       |
| ET35-25   | 25        | 39.0 |      |      |      |      |                  |                 |            |             |
| ET50-20   | 20        | 36.0 | 15.3 | 16.0 | 10.9 | 10.4 | #1               | 50.0            |            | Olive Green |
| ET50-25   | 25        | 41.0 |      |      |      |      |                  |                 |            |             |
| ET70-20   | 20        | 37.0 | 16   | 17.0 | 14.3 | 13.5 | #2/0             | 70.0            |            | Yellow      |
| ET70-25   | 25        | 42.0 |      |      |      |      |                  |                 |            |             |
| ET70-27   | 27        | 44.0 |      |      |      |      |                  |                 |            |             |
| ET95-25   | 25        | 43.6 | 18.2 | 18.6 | 15.3 | 14.5 | #3/0             | 95.0            |            | Red         |
| ET120-27  | 27        | 47.2 |      |      |      |      |                  |                 |            |             |
| ET120-32  | 32        | 52.2 |      |      |      |      |                  |                 |            |             |
| ET150-25  | 25        | 50.6 |      |      |      |      |                  |                 |            |             |
| ET150-27  | 27        | 52.6 | 23.4 | 25.6 | 20.6 | 19.6 | 250-300 mcm      | 150.0           |            | Yellow      |
| ET150-32  | 32        | 57.6 |      |      |      |      |                  |                 |            |             |

## Insulated Twin Cord End Terminals

Limited W.T : -14 to105 Ui=300V termina material : tin coated copper




| Item No.  | DIMENSION |      |      |      |     |     | Insulated square<br>mm <sup>2</sup> | Color  |         |
|-----------|-----------|------|------|------|-----|-----|-------------------------------------|--------|---------|
|           | F         | L    | W    | B    | D   | C   |                                     | France | Germany |
|           | mm        | mm   | mm   | mm   | mm  | mm  |                                     |        |         |
| EW0.5-8   | 8         | 15.0 | 5.0  | 7.0  | 1.8 | 1.5 | 2x0.5                               | White  | White   |
| EW0.75-8  | 8         | 15.8 | 5.3  | 7.8  | 2.1 | 1.8 | 2x0.75                              | Blue   | Gray    |
| EW0.75-10 | 10        | 17.8 | 5.3  | 7.8  | 2.1 | 1.8 | 2x0.75                              | Blue   | Gray    |
| EW1.0-8   | 8         | 16.0 | 5.3  | 8.0  | 2.4 | 2.1 | 2x1.0                               | Red    | Red     |
| EW1.0-10  | 10        | 18.0 | 5.3  | 8.0  | 2.4 | 2.1 | 2x1.0                               | Red    | Red     |
| EW1.5-8   | 8         | 16.0 | 6.2  | 8.0  | 2.6 | 2.3 | 2x1.5                               | Black  | Yellow  |
| EW1.5-12  | 12        | 20.0 | 6.2  | 8.0  | 2.6 | 2.3 | 2x1.5                               | Black  | Yellow  |
| EW2.5-10  | 10        | 19.8 | 7.8  | 9.8  | 3.3 | 2.9 | 2x2.5                               | Gray   | Blue    |
| EW2.5-12  | 12        | 21.8 | 7.8  | 9.8  | 3.3 | 2.9 | 2x2.5                               | Gray   | Blue    |
| EW4.0-12  | 12        | 22.2 | 8.5  | 10.2 | 4.2 | 3.8 | 2x4.0                               | Orange | Gray    |
| EW6.0-14  | 14        | 25.2 | 9.5  | 11.2 | 5.3 | 4.9 | 2x6.0                               | Green  | Yellow  |
| EW10-14   | 14        | 26.0 | 12.6 | 12.0 | 6.9 | 6.5 | 2x10.0                              | Brown  | Red     |
| EW16-14   | 14        | 30.3 | 19.0 | 16.3 | 8.7 | 8.3 | 2x16.0                              | Milk   | Blue    |

More choice : more Color,come with MOQ

Use note:this series installed with tool of YAC series

## EN Non-Insulated Cord End Terminals



Limited W.T : 105 Ui=300V Terminal material: Tin coated copper

| Item No.  | DIMENSION |     |     |     | Insulated square |                 |
|-----------|-----------|-----|-----|-----|------------------|-----------------|
|           | L         | D   | C   | W   | AWG              | mm <sup>2</sup> |
| EN0.5-6   | 6         | 1.3 | 1.0 | 1.7 | #22              | 0.5             |
| EN0.5-8   | 8         | 1.3 | 1.0 | 1.7 | #22              | 0.5             |
| EN0.5-10  | 10        | 1.3 | 1.0 | 1.7 | #22              | 0.5             |
| EN0.5-12  | 12        | 1.3 | 1.0 | 1.7 | #22              | 0.5             |
| EN0.75-6  | 6         | 1.5 | 1.2 | 1.9 | #20              | 0.75            |
| EN0.75-8  | 8         | 1.5 | 1.2 | 1.9 | #20              | 0.75            |
| EN0.75-10 | 10        | 1.5 | 1.2 | 1.9 | #20              | 0.75            |
| EN0.75-12 | 12        | 1.5 | 1.2 | 1.9 | #20              | 0.75            |
| EN1.0-6   | 6         | 1.7 | 1.4 | 2.2 | #18              | 1.0             |
| EN1.0-8   | 8         | 1.7 | 1.4 | 2.2 | #18              | 1.0             |
| EN1.0-10  | 10        | 1.7 | 1.4 | 2.2 | #18              | 1.0             |
| EN1.0-12  | 12        | 1.7 | 1.4 | 2.2 | #18              | 1.0             |
| EN1.5-8   | 8         | 2.0 | 1.7 | 2.5 | #16              | 1.5             |
| EN1.5-10  | 10        | 2.0 | 1.7 | 2.5 | #16              | 1.5             |
| EN1.5-12  | 12        | 2.0 | 1.7 | 2.5 | #16              | 1.5             |
| EN1.5-18  | 18        | 2.0 | 1.7 | 2.5 | #16              | 1.5             |
| EN2.5-8   | 8         | 2.5 | 2.2 | 3.3 | #14              | 2.5             |
| EN2.5-10  | 10        | 2.5 | 2.2 | 3.3 | #14              | 2.5             |
| EN2.5-12  | 12        | 2.5 | 2.2 | 3.3 | #14              | 2.5             |
| EN2.5-18  | 18        | 2.5 | 2.2 | 3.3 | #14              | 2.5             |
| EN4.0-9   | 9         | 3.2 | 2.8 | 3.9 | #12              | 4.0             |
| EN4.0-12  | 12        | 3.2 | 2.8 | 3.9 | #12              | 4.0             |
| EN4.0-18  | 18        | 3.2 | 2.8 | 3.9 | #12              | 4.0             |
| EN6.0-10  | 10        | 3.9 | 3.5 | 4.8 | #10              | 6.0             |
| EN6.0-12  | 12        | 3.9 | 3.5 | 4.8 | #10              | 6.0             |
| EN6.0-15  | 15        | 3.9 | 3.5 | 4.8 | #10              | 6.0             |
| EN6.0-18  | 18        | 3.9 | 3.5 | 4.8 | #10              | 6.0             |
| EN10-12   | 12        | 4.9 | 4.5 | 5.8 | #7               | 10.0            |
| EN10-15   | 15        | 4.9 | 4.5 | 5.8 | #7               | 10.0            |
| EN10-18   | 18        | 4.9 | 4.5 | 5.8 | #7               | 10.0            |
| EN16-12   | 12        | 6.2 | 5.8 | 7.2 | #5               | 16.0            |
| EN16-15   | 15        | 6.2 | 5.8 | 7.2 | #5               | 16.0            |
| EN16-18   | 18        | 6.2 | 5.8 | 7.2 | #5               | 16.0            |

| Item No. | 寸DIMENSION |      |      |      | Insulated square |                 |
|----------|------------|------|------|------|------------------|-----------------|
|          | L          | D    | C    | W    | AWG              | mm <sup>2</sup> |
| EN25-16  | 16         | 7.9  | 7.5  | 9.1  | #4               | 25              |
| EN25-22  | 22         | 7.9  | 7.5  | 9.1  | #4               | 25              |
| EN35-16  | 16         | 8.7  | 8.3  | 10.2 | #2               | 35              |
| EN35-25  | 25         | 8.7  | 8.3  | 10.2 | #2               | 35              |
| EN50-20  | 20         | 10.9 | 10.3 | 12.4 | #1               | 50              |
| EN50-25  | 25         | 10.9 | 10.3 | 12.4 | #1               | 50              |
| EN70-25  | 25         | 14.3 | 13.5 | 15.8 | 2/0              | 70              |
| EN70-32  | 32         | 14.3 | 13.5 | 15.8 | 2/0              | 70              |
| EN95-25  | 25         | 15.3 | 14.5 | 17.3 | 3/0              | 95              |
| EN95-32  | 32         | 10.9 | 10.3 | 12.4 | 3/0              | 95              |
| EN120-32 | 32         | 17.5 | 16.5 | 20.2 | 4/0              | 120             |
| EN150-40 | 40         | 20.6 | 19.6 | 23.0 | 250/300          | 150             |
| EN185-40 | 40         | 21.4 | 20.2 | 23.9 | 250/300          | 185             |

ID CONNECTING